



SPECIFICATIONS

WX VALOR / CHVAL01



FOIL™ ANTI-FOG COATING

DOUBLE INJECTED NOSE BRIDGE FOR SECURE FIT



DOUBLE TEMPLES FOR SECURE FIT

RX CAPABLE

INTERCHANGEABLE LENS OPTIONS CLEAR, SMOKE, LIGHT RUST AND POLARIZED SMOKE GREY WITH 100% UVA/UVB PROTECTION

PACKAGES

CHVAL01 BLACK FRAME – SMOKE GREY LENSES

CHVAL06 BLACK FRAME – SMOKE GREY, CLEAR, LIGHT RUST LENSES

CHVAL07 BLACK FRAME – SMOKE GREY, CLEAR LENSES

CHVAL08 BLACK FRAME – POLARIZED SMOKE GREY LENSES (BLACK OPS)


NSN LISTED = APEL APPROVED

CH4701 NSN 4240-01-630-7802 TWO LENS SYSTEM – SMOKE AND CLEAR

LENSES

- INTERCHANGEABLE LENS OPTIONS: CLEAR, SMOKE OR LIGHT RUST 100% UVA/UVB PROTECTION
- SHATTERPROOF SELENITE™ LENS MEETS THE MIL-PRF-324532(GL)BALLISTIC STANDARD
- T-SHELL™ ANTI SCRATCH HARD COAT FOR LONGER LENS LIFE
- FILTER 8™ POLARIZED LENS OPTION
- FOIL™ ANTI-FOG COATING

WILEY X VALOR MEETS ANSI, EN166 AND MILITARY VO BALLISTIC STANDARDS

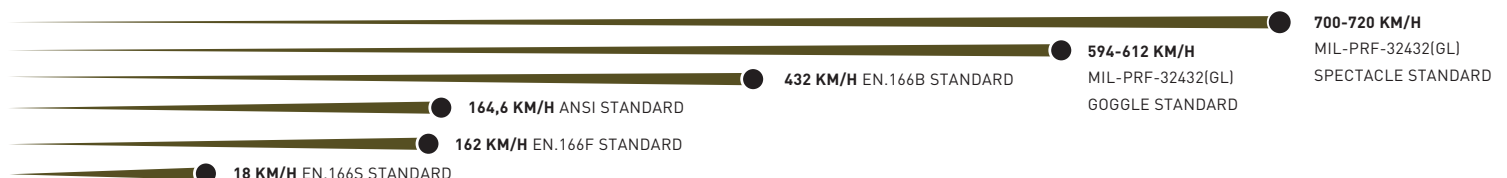

WILEY X, INC., USA 7800 Patterson Pass Rd. Livermore, CA 94550 USA
Tel: 1.800.776.7842 | Fax: 925.455.8860 | www.wileyx.com

WILEY X EMEA LLC, Søndergade 8-10, 7570 Vemb, Denmark
Tel: +45.96.93.00.45 | Fax: +45.96.93.00.40 | www.wileyx.eu